

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
16 October 2003 (16.10.2003)

PCT

(10) International Publication Number  
**WO 03/085878 A1**

- (51) International Patent Classification<sup>7</sup>: **H04L 1/18**, H04B 7/005
- (21) International Application Number: PCT/IB03/00962
- (22) International Filing Date: 28 February 2003 (28.02.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0208235.2 10 April 2002 (10.04.2002) GB  
0209820.0 30 April 2002 (30.04.2002) GB  
0218395.2 8 August 2002 (08.08.2002) GB
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MOULSLEY, Timothy, J.** [GB/GB]; Cross Oak Lane, Redhill, Surrey RH1 5HA (GB). **BAKER, Matthew, P., J.** [GB/GB]; Cross Oak Lane, Redhill, Surrey RH1 5HA (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMMUNICATION SYSTEM USING ARQ

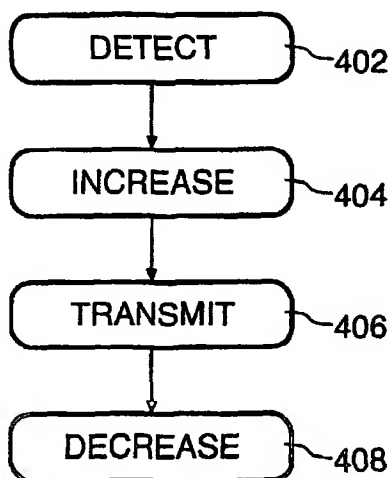

(57) Abstract: A communication system comprises a downlink data channel for the transmission of data packets from a primary station to a secondary station and two uplink control channels, a first channel for transmission of status signals to indicate the status of received data packets and a second channel for transmission of pilot information. In operation, on detection (402) of a data packet the secondary station increases (404) the transmission power of the second channel, thereby enabling the primary station to obtain a better estimate of uplink channel properties and hence increase the accuracy with which it can decode the status signal. The secondary station transmits (406) the status signal, typically either an acknowledgement (ACK) or negative acknowledgement (NACK), and decreases (408) the transmission power of the second control channel signal. The increase and decrease in power are not necessarily identical, for example as a result of the effects of power control.

WO 03/085878 A1

**COMMUNICATION SYSTEM USING ARQ**Technical Field

5           The present invention relates to a communication system and further relates to primary and secondary stations for use in such a system and to a method of operating such a system. While the present specification describes a system with particular reference to the Universal Mobile Telecommunication System (UMTS), it is to be understood that such techniques are equally  
10 applicable to use in other communication systems.

Background Art

          There is a growing demand in the mobile communication area for a system having the ability to download large blocks of data to a Mobile Station (MS) on demand at a reasonable rate. Such data could for example be web  
15 pages from the Internet, possibly including video clips or similar. Typically a particular MS will only require such data intermittently, so fixed bandwidth dedicated links are not appropriate. To meet this requirement in UMTS, a High-Speed Downlink Packet Access (HSDPA) scheme is being developed which may facilitate transfer of packet data to a mobile station at up to at least  
20 4Mbps.

          A conventional component of a packet data transmission system is an ARQ (Automatic Repeat reQuest) process, for handling data packets received in error. For example, consider downlink packet transmission from a Base Station (BS) to a Mobile Station (MS) in HSDPA. When the MS receives a data  
25 packet it determines whether the packet has been corrupted, for example using Cyclic Redundancy Check (CRC) information. It then transmits a signal in a field allocated for this purpose to the BS, with a first signal used as an acknowledgement (ACK), to indicate that the packet was successfully received, and a second signal used as a negative acknowledgement (NACK),  
30 to indicate that the packet was received but corrupted. The signals may for example be different codewords or the same codeword transmitted at different powers.

In the presently-defined scheme for HSDPA a number of channels are defined, each handling different types of information: only those relevant to the present invention will be discussed here. Data packets are transmitted from the BS to the MS on a (high speed) downlink data channel, and in the reverse direction on an uplink data channel. Two uplink control channels are defined for signalling by the mobile. Transmission of ACK/NACK messages is performed on a first uplink control channel (a High Speed Dedicated Physical Control Channel, HS-DPCCH), while transmission of pilot information, to enable the BS to obtain a channel estimate of the uplink channel, is performed on a second uplink control channel (a DPCCH). The power level of the second control channel is set by the BS using closed loop power control. The power level of the uplink data channel is determined from the power of the second control channel. The ratio of these two power levels is determined by a gain factor which may be signalled to the MS or determined independently by the MS.

The consequences of errors in ACK and NACK messages are significantly different. Normally the BS would re-transmit a packet if a NACK were received. If the BS receives a NACK when an ACK is sent, then the packet is re-transmitted anyway. This only wastes a little system resource. If a NACK is sent, but received as an ACK, then no re-transmission is sent. Without special physical layer mechanisms, this situation can only be recovered from by using higher layer processes, which add delay and represent a significant waste of system resources. Thus the cost of an error in a NACK is much more serious than the cost of an error in a ACK, and consequently the performance requirements in 3GPP have been set at  $10^{-2}$  for ACK errors and  $10^{-4}$  for NACK errors. Achieving these error rates require good channel estimates. In particular, the channel phase is needed to determine correctly the phase of data symbols when phase modulation is used (for example BPSK or QPSK). For a modulation scheme where amplitude is also significant, such as m-QAM (where m may for example be 16), the channel amplitude would also be needed.

Disclosure of Invention

An object of the present invention is to address the need for good channel estimates.

According to a first aspect of the present invention there is provided a  
5 communication system having a downlink data channel for the transmission of  
data packets from a primary station to a secondary station, a first uplink control  
channel for the transmission of information relating to reception of data  
packets from the secondary station to the primary station, and a second uplink  
control channel for the transmission of pilot information, the secondary station  
10 having receiving means for receiving a data packet and acknowledgement  
means for transmitting a status signal on the first control channel to the  
primary station to indicate the status of a received data packet, wherein the  
secondary station comprises power control means for temporarily increasing  
the transmission power of at least the part of the second control channel  
15 including pilot information for a predetermined period during which the status  
signal is transmitted.

The temporary increase in the transmission power of pilot signals can  
improve channel estimation and hence accuracy of detection of ACK/NACK  
messages without significantly increasing overall interference levels. The  
20 power increase at the start of the period of temporarily increased power may  
differ from the decrease at the end of the period, for example as a result of the  
actions of inner-loop power control.

According to a second aspect of the present invention there is provided  
a primary station for use in a communication system having a downlink data  
25 channel for the transmission of data packets from the primary station to a  
secondary station, a first uplink control channel for the transmission of  
information relating to reception of data packets from the secondary station to  
the primary station, and a second uplink control channel for the transmission of  
pilot information, wherein means are provided for receiving a status signal on  
30 the first control channel indicating the status of a data packet transmitted to the  
secondary station, closed loop power control means are provided for  
controlling the power of the uplink control channel, and means are provided for

adjusting the operation of the power control means for a predetermined period around a time when transmission of a status signal by the secondary station is expected to take into account a temporary increase of the transmission power of at least the part of the second control channel including pilot information.

5        According to a third aspect of the present invention there is provided a secondary station for use in a communication system having a downlink data channel for the transmission of data packets from a primary station to a secondary station, a first uplink control channel for the transmission of information relating to reception of data packets from the secondary station to  
10       the primary station, and a second uplink control channel for the transmission of pilot information, wherein receiving means are provided for receiving a data packet from the primary station and acknowledgement means are provided for transmitting a status signal on the first control channel to the primary station to indicate the status of a received data packet, wherein power control means are  
15       provided for temporarily increasing the transmission power of at least the part of the second control channel including pilot information for a predetermined period during which the status signal is transmitted.

      According to a fourth aspect of the present invention there is provided a method of operating a communication system having a downlink data channel  
20       for the transmission of data packets from a primary station to a secondary station, a first uplink control channel for the transmission of information relating to reception of data packets from the secondary station to the primary station, and a second uplink control channel for the transmission of pilot information, the method comprising the secondary station receiving a data packet and  
25       transmitting a status signal on the first control channel to the primary station to indicate the status of a received data packet, wherein the secondary station temporarily increases the transmission power of at least the part of the second control channel including pilot information for a predetermined period during which the status signal is transmitted.

#### 30       Brief Description of Drawings

      Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a radio communication system;

Figure 2 is a diagram illustrating operation of a known stop-and-wait ARQ scheme;

5        Figure 3 is a diagram illustrating operation of a known n-channel ARQ scheme; and

Figure 4 is a flow chart showing a method of operating a packet data transmission system in accordance with the present invention.

10        In the drawings the same reference numerals have been used to indicate corresponding features.

#### Modes for Carrying Out the Invention

Referring to Figure 1, a radio communication system comprises a primary station (BS) 100 and a plurality of secondary stations (MS) 110. The BS 100 comprises a microcontroller ( $\mu$ C) 102, transceiver means (Tx/Rx) 104  
15        connected to antenna means 106, power control means (PC) 107 for altering the transmitted power level, and connection means 108 for connection to the PSTN or other suitable network. Each MS 110 comprises a microcontroller ( $\mu$ C) 112, transceiver means (Tx/Rx) 114 connected to antenna means 116, and power control means (PC) 118 for altering the transmitted power level.  
20        Communication from BS 100 to MS 110 takes place on a downlink channel 122, while communication from MS 110 to BS 100 takes place on an uplink channel 124.

An example of the operation of a known stop-and-wait ARQ scheme is illustrated in Figure 2. Data packets 202, identified as  $P_n$  where  $n$  is a one-bit  
25        sequence number, are transmitted in allocated time slots on a downlink data channel (DL) 122 from a BS 100 to a MS 110. The first data packet  $P_0$ , with sequence number 0, is received in a corrupted state by the MS 110, which therefore transmits a negative acknowledgement (N) 204 on a first uplink control channel in a field reserved for transmission of positive and negative  
30        acknowledgements. In response to this the BS 100 retransmits the first data packet 202, which this time is received correctly by the MS 100 which transmits an acknowledgement (A) 206. The BS 100 then transmits the next

packet, with sequence number 1. The BS 100 also retransmits a data packet 202 if it receives no acknowledgement within a predetermined time-out period (in case the MS 110 did not receive the packet at all or the acknowledgement was lost). If the MS 110 did in fact receive the previously transmitted packet  
5 202 it can determine that the received packet 202 is a retransmission as it has the same sequence number as the previous packet.

Improved throughput can be obtained by use of multi-channel ARQ schemes. An example of a 4-channel ARQ scheme operating in known manner is illustrated in Figure 3. Data packets 202, identified as  $P_n$  where  $n$  is  
10 a sequence number, are transmitted in sequence on a downlink channel (DL) 122 from a BS 100 to a MS 110. Each packet 202 is assigned to a logical channel (CH) in turn, starting with the first packet. Hence, packet  $P_1$  is assigned to channel 1, packet  $P_2$  to channel 2 and so on. ARQ is performed separately for each channel.

15 In the illustrated scenario, the first data packet  $P_1$  is sent via the first logical channel and is received correctly by the MS 110, which transmits an acknowledgement ( $A_1$ ) 206 on an uplink channel 124. Hence, when channel 1 is next scheduled for transmission, the next packet awaiting transmission,  $P_5$  is selected and transmitted to the MS 110. Similarly, the second data packet  $P_2$   
20 is sent via the second logical channel. However, this packet is not received correctly by the MS 110, which issues a negative acknowledgement ( $N_2$ ) 204. Hence, when channel 2 is next scheduled for transmission, packet  $P_2$  is transmitted again. This time it is correctly received, and an acknowledgement 206 is issued on the uplink channel 124, thereby freeing channel 2 to transmit  
25 further packets 202.

As discussed above, in order for the BS 100 to achieve the required accuracy levels in decoding ACK/NACK messages, a good channel estimate is required. The channel estimate is performed, in known manner, from reception of pilot information transmitted on a second uplink control channel. The power  
30 level of the second uplink control channel is normally set to provide the correct power level for the uplink data channel according to the relative gain factor between the two channels. However, in this case the power level set for the

second uplink control channel may not be high enough to enable sufficiently good channel estimation for reliable detection of ACK/NACK messages at the same time.

In a system made in accordance with the present invention, this  
5 problem is addressed by temporarily increasing the power of the second uplink control channel (or at least the portion of the channel including the pilot information) when an ACK/NACK message is to be transmitted. Following transmission of the message the power level is reduced by the same amount.

The operation of such a system will be explained with reference to the  
10 flow chart shown in Figure 4. The method starts, at step 402, with the MS 110 detecting a downlink data packet 202. In response to this detection the MS 110 increases, as step 404, the transmission power of the second control channel by a predetermined amount. The MS 110 then determines whether or not the data packet was received correctly, and transmits an ACK 206 or a  
15 NACK 204 as appropriate, as step 406. Finally, at step 408, the MS 110 reduces the transmission power of the second control channel by a predetermined amount, which is not necessarily identical to the amount by which the power was increased in step 404. An example of a situation where different amounts may be required is in a system where the start and end of  
20 the period of temporarily increased power occur at the same time as (and are therefore combined with) regular inner-loop power control steps. The power control steps could well be in opposite directions at the start and end of the period, leading to the amounts of the increase and decrease in power being different.

25 In a HSDPA embodiment, the presence of a packet destined for a MS 110 is signalled by a packet indicator message on a packet indicator channel and/or a control channel distinct from the packet transmission channel. In such an embodiment, the trigger for increasing the transmission power of the second control channel could require the correct decoding of an associated  
30 downlink control channel (including a CRC), in addition to the detection of a packet indicator. This should help to avoid spurious triggering of the timer by false detection of a packet indicator.



Once a packet indicator message has been detected, the power increase could be applied at the start of the slot in the second uplink control channel immediately before the scheduled time for transmission of an ACK/NACK message on the first uplink control channel. The power increase  
5 could then be removed at the end of the slot following the transmission of the ACK/NACK message (or optionally later). This arrangement permits the possibility of transmitting more than one set of pilot symbols at the higher power level, which should assist the BS 100 in tracking channel changes. However, ideally the period of increased transmission power should always  
10 include at least one pilot field (comprising a complete set of pilot symbols or bits). It should be noted that there is no requirement for the first and second uplink control channels to have their slots aligned (or even of equal duration). Similarly there is no need for power changes to be applied at slot boundaries, although this is particularly convenient for HSDPA.

15 The power increase could be defined as a power offset (which would therefore have to be positive) with respect to the normal power level of the second uplink control channel. In this case normal power control operation of this channel would apply after the offset had been applied or removed, since the BS 100 would be aware of the rules used by the MS 110 to apply the  
20 power offset and could modify power control operation accordingly (if needed). However, a difficulty with this is that the BS 100 would not necessarily have complete knowledge of whether the mobile was using an offset (since this depends on detection of a data packet).

A range of variations on the basic scheme described above is possible.

25 For example:

- The power offset could be fixed for all mobiles, or signalled to the mobile. If signalled, the signalling could be via a normal signalling channel or, in the case of HSDPA, via the HS-SCCH (High Speed Shared Control CHannel), which would allow faster updating of the power offset in response to  
30 changing channel conditions.
- Different power offsets could be applied for ACK 206 and NACK 204 messages. However, there would be an additional delay before the packet

status was known. The choice of power offsets would represent a balance between performance and interference.

- If the power offset is signalled the value could be determined according to a predetermined detection threshold at the BS 100.
- 5 • It could be desirable to update the power offset and other parameters (e.g. number of repetitions of ACK/NACK) at the same time, in order to maintain substantially constant reliability of ACK/NACK messages.
- The power offset could be changed during the period of increased power (e.g. starting with an initial value and changing when the packet status was  
10 known).
- The duration of the power offset could also be set by a timer, starting from the point at which a data packet is detected or received. Such a timer would typically be implemented as a counter counting in predetermined units, for example milliseconds, frames, time slots, messages or other  
15 suitable units.
- Any power offset applied in accordance with the present invention could be applied in addition to power offsets determined by other mechanisms, such as power changes signalled to the MS 110 or changes made for other purposes than those discussed here.

20 As a more detailed example for UMTS HSDPA, the reliability of ACK/NACK can be improved by repetition of the ACK/NACK message. However, it may not be permitted to send more data packets during the repetition period, which would limit the achievable bit rate. Therefore, if the required bit rate increases it could be necessary to reduce the number of  
25 repetitions of ACK/NACK. To maintain substantially the same overall reliability of ACK/NACK, a power offset could be applied at the same time, either to increase the DPCCH power, or to the power of the HS-DPCCH (which carries ACK/NACK) relative to the DPCCH. If this signalling is carried on the HS-SCCH, then it is desirable to minimise the total number of bits used. If two bits  
30 were allocated then four different combinations could be signalled, as in the following table:

Signalled Bit Pattern	Power Offset	Number of Repetitions
00	No change	No change
01	Decrease by 3dB	Increase by 1
10	Increase by 3dB	Decrease by 1
11	Increase by 6dB	Decrease by 2

The changes could be with respect to pre-determined values, or to values sent using higher layer signalling, or to the current values. The power offset values mentioned here could apply to DPCCH or HS-DPCCH, depending on the embodiment. Some restrictions might be placed on maximum and minimum values, particularly where the changes are relative to current values. The minimum number of ACK/NACK transmissions would obviously be limited to 1. In the case of only one bit available for signalling only two combinations could be used, for example as shown below:

Signalled Bit	Power Offset	Number of Repetitions
0	Decrease by 3dB	Increase by 1
1	Increase by 3dB	Decrease by 1

In the case that the period of the power offset is more than a small number of slots, then modified power control operation could be considered. This could be applied over a similar time period to that for which any power offset is applied. As a specific example, in UMTS soft handover (where a MS 110 is in communication with two or more base stations 100, these being known as the active set) the power control action taken by the MS 110 is derived by considering power control commands sent from all the base stations in the active set. In a system made in accordance with the present invention this could be modified so that the MS 110 only or preferentially considers power control commands sent from the BS 100 which is also sending data packets for the duration of the modified power control operation.

As discussed above, the power level of the uplink data channel is determined from the power level of the second control channel, which is set by the BS using closed loop power control. The ratio of these two power levels is determined by a gain factor  $A$  which may be signalled to the MS 110 or determined independently by the MS. While the power increase is applied, the

gain factor could be re-calculated in order to keep the power level of the uplink data channel constant (relative to a target level). This is desirable in order to avoid generation of extra interference or affecting the quality of data sent on data channel.

5 For UMTS FDD mode the Uplink target SIR (which applies to the pilot field on the uplink DPCCH) can be signalled from the RNC (Radio Network Controller) to the BS 100 (or Node B). This mechanism could be used to increase DPCCH power on a long term basis and thereby improve ACK/NACK reliability, at the cost of increased interference. Using the method of the  
10 present invention, it would be desirable to provide extra signalling to indicate to the Node B the size of any temporary power offset to be applied to the target SIR when ACK/NACK is expected to be sent by the MS 110. Suitable values for the offset might, for example, be 0, 2, 4 or 6dB.

One possible embodiment would be to apply the current invention only  
15 when the MS 110 is not in soft handover. When in soft handover (i.e. the MS 110 is in communication with more than one BS), the existing higher layer signalling could be used to increase the DPCCH power on a long term basis.

In UMTS, a mechanism for defining and quantising gain parameters and the resultant gain factor has already been defined. In a system made in  
20 accordance with the present invention, when a power offset is applied to the second control channel, new gain parameters need to be determined and quantised, the aim being to keep the power level of the uplink data channel at a similar level to what it would have been without the power offset applied to the second control channel. One way in which this can be performed is to  
25 compute the gain factor  $A$  as

$$A = \frac{\beta_d}{\beta_c \times \Delta}$$

where  $\beta_d$  is the gain parameter applying to the uplink data channel,  $\beta_c$  is the gain parameter applying to the second uplink control channel,  $\Delta = 10^{\delta/20}$ , and  $\delta$  is the additional power offset (in dB) to be applied to the second control  
30 channel. In the present UMTS specifications, the gain parameters are

quantised to values of between 0 and 1 with each step being 1/15. Adapting this implementation, one embodiment of the present invention could operate so that:

- if  $A > 1$ , then new values should be set so that  $\beta_d = 1$  and  $\beta_c$  is the largest  
5 quantised gain factor for which  $\beta_c \leq 1/A$ ; and
- if  $A \leq 1$ , then new values should be set so that  $\beta_c = 1$  and  $\beta_d$  is the smallest quantised gain factor for which  $\beta_d \geq A$ .

A similar set of modifications to the gain factor and parameters is required when  $\Delta$  represents a decrease in power after the ACK/NACK  
10 message has been transmitted.

The operation of the present invention could be controlled (e.g. enabled, modified or disabled) by specific signalling messages. Additionally, this control could be carried out implicitly according to the values of parameters signalled for other purposes. For example, if operation of the  
15 invention is controlled by analysis of a predetermined number (K) of power control commands, operation could be disabled by the BS 100 signalling the value of K as zero.

The same approach as that described above could be used to improve the reliability of other signals transmitted on the first control channel, for  
20 example Channel Quality Information (CQI). The power offset used for other signals could be different from that used for ACK/NACK messages.

The above description is aimed at a downlink data channel in UMTS FDD (Frequency Division Duplex) mode. The invention could also be applied to TDD (Time Division Duplex) mode and to an uplink data channel.

25 The description above related to the BS 100 performing a variety of roles relating to the present invention. In practice these tasks may be the responsibility of a variety of parts of the fixed infrastructure, for example in a "Node B", which is the part of the fixed infrastructure directly interfacing with a MS 110, or at a higher level in the Radio Network Controller (RNC). In this  
30 specification, the use of the term "base station" or "primary station" is therefore

to be understood to include the parts of the network fixed infrastructure involved in an embodiment of the present invention.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other  
5 features which are already known in the design, manufacture and use of communication systems and component parts thereof, and which may be used instead of or in addition to features already described herein.

## CLAIMS

1. A communication system having a downlink data channel for the transmission of data packets from a primary station to a secondary station, a  
5 first uplink control channel for the transmission of information relating to reception of data packets from the secondary station to the primary station, and a second uplink control channel for the transmission of pilot information, the secondary station having receiving means for receiving a data packet and acknowledgement means for transmitting a status signal on the first control  
10 channel to the primary station to indicate the status of a received data packet, wherein the secondary station comprises power control means for temporarily increasing the transmission power of at least the part of the second control channel including pilot information for a predetermined period during which the status signal is transmitted.

15

2. A primary station for use in a communication system having a downlink data channel for the transmission of data packets from the primary station to a secondary station, a first uplink control channel for the transmission of information relating to reception of data packets from the  
20 secondary station to the primary station, and a second uplink control channel for the transmission of pilot information, wherein means are provided for receiving a status signal on the first control channel indicating the status of a data packet transmitted to the secondary station, closed loop power control means are provided for controlling the power of the uplink control channel, and  
25 means are provided for adjusting the operation of the power control means for a predetermined period around a time when transmission of a status signal by the secondary station is expected to take into account a temporary increase of the transmission power of at least the part of the second control channel including pilot information.

30

3. A primary station as claimed in claim 2, characterised in that means are provided for signalling to the secondary station the magnitude of the power increase which should be applied.

5 4. A primary station as claimed in claim 3, characterised in that means are provided for signalling a change in another parameter at the same time as a power offset is signalled.

5. A primary station as claimed in claim 4, characterised in that the  
10 other parameter is the number of repetitions of a status signal.

6. A secondary station for use in a communication system having a downlink data channel for the transmission of data packets from a primary station to a secondary station, a first uplink control channel for the  
15 transmission of information relating to reception of data packets from the secondary station to the primary station, and a second uplink control channel for the transmission of pilot information, wherein receiving means are provided for receiving a data packet from the primary station and acknowledgement means are provided for transmitting a status signal on the first control channel  
20 to the primary station to indicate the status of a received data packet, wherein power control means are provided for temporarily increasing the transmission power of at least the part of the second control channel including pilot information for a predetermined period during which the status signal is transmitted.

25

7. A secondary station as claimed in claim 6, characterised in that the amount by which the transmission power is increased at the start of the predetermined period is different from the amount by which the power is decreased at the end of the predetermined period.

30

8. A secondary station as claimed in claim 6 or 7, characterised in that means are provided for increasing the transmission power by different



amounts depending on whether the status signal is an acknowledgement or a negative acknowledgement.

9. A secondary station as claimed in any one of claims 6 to 8,  
5 characterised in that means are provided for increasing the transmission power by a first amount at the start of the predetermined period and by a second amount when the type of status signal to be transmitted has been determined, the second amount depending on whether the status signal is an acknowledgement or a negative acknowledgement.

10

10. A secondary station as claimed in any one of claims 6 to 9, characterised in that the system further comprises an uplink data channel, in that a gain factor is defined as the ratio between the transmission power of the second uplink control channel and the transmission power of the uplink data  
15 channel, and in that means are provided for adjusting the gain factor for the duration of the transmission power increase, thereby maintaining the transmission power of the uplink data channel at a similar level to that before the power increase.

20 11. A secondary station as claimed in any one of claims 6 to 10, characterised in that means are provided for resetting a timer on detection of an indication that a data packet has been transmitted to the secondary station and in that the predetermined period lasts until the timer expires.

25 12. A secondary station as claimed in any one of claims 6 to 11, characterised in that means are provided for communicating substantially simultaneously with a plurality of primary stations, for receiving power control commands from each of the primary stations and for receiving a data packet from any one of the primary stations, characterised in that means are provided  
30 for setting the power of uplink transmissions depending on power control commands received from the primary station which transmitted the packet for the duration of the predetermined period.

13. A method of operating a communication system having a downlink data channel for the transmission of data packets from a primary station to a secondary station, a first uplink control channel for the transmission of information relating to reception of data packets from the secondary station to the primary station, and a second uplink control channel for the transmission of pilot information, the method comprising the secondary station receiving a data packet and transmitting a status signal on the first control channel to the primary station to indicate the status of a received data packet, wherein the secondary station temporarily increases the transmission power of at least the part of the second control channel including pilot information for a predetermined period during which the status signal is transmitted.

1/2

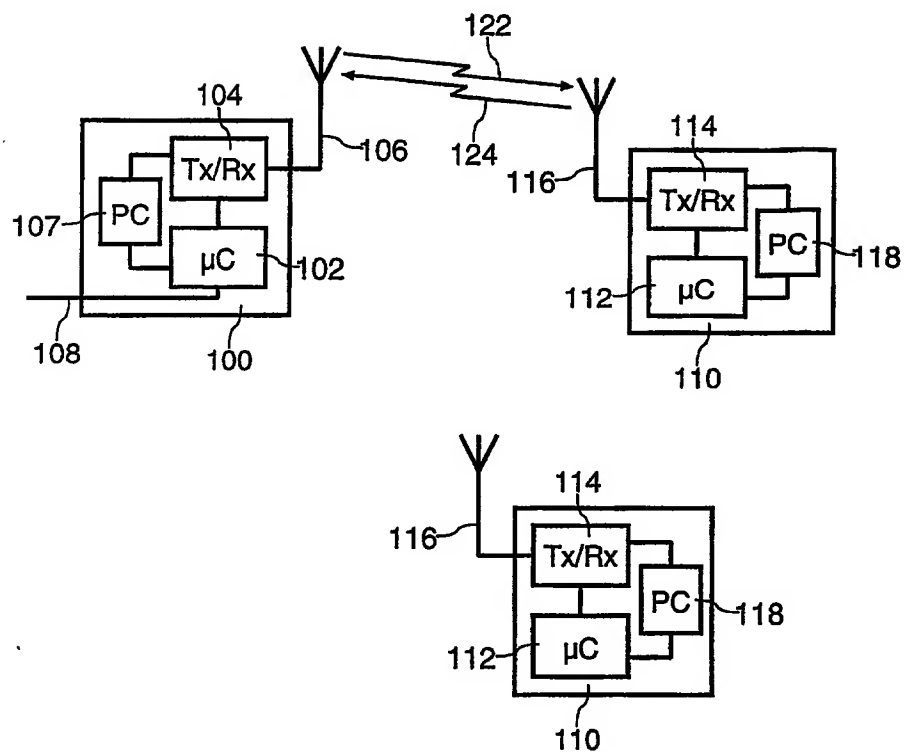


FIG. 1

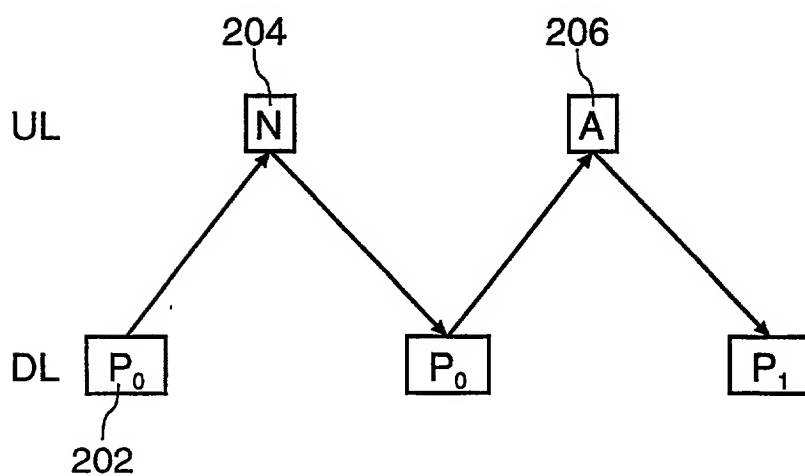
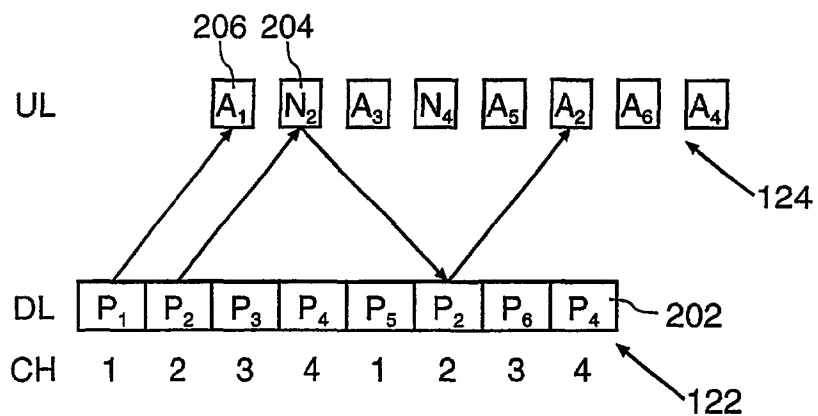
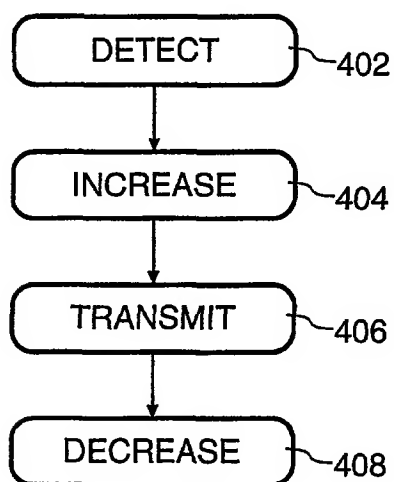


FIG. 2

2/2

**FIG. 3****FIG. 4**

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/IB 03/00962

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L1/18 H04B7/005

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/028691 A1 (BAKER MATTHEW P J ET AL) 7 March 2002 (2002-03-07) abstract paragraphs '0072!-'0074! claims 16,20	1-13
A	WO 02 19605 A (QUALCOMM INC) 7 March 2002 (2002-03-07) abstract page 6, line 16 -page 8, line 8	1-13
A	EP 1 143 635 A (NTT DOCOMO INC) 10 October 2001 (2001-10-10) abstract column 2, line 36 -column 4, line 34	1-13

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*S\* document member of the same patent family

Date of the actual completion of the international search

20 June 2003

Date of mailing of the international search report

01/07/2003

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Helms, J

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 03/00962

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002028691 A1	07-03-2002	CN 1394393 T WO 0217511 A2 EP 1232577 A2	29-01-2003 28-02-2002 21-08-2002
WO 0219605 A	07-03-2002	AU 8850801 A EP 1314276 A2 NO 20030949 A WO 0219605 A2	13-03-2002 28-05-2003 30-04-2003 07-03-2002
EP 1143635 A	10-10-2001	JP 2001292096 A JP 2001292097 A CN 1317885 A EP 1143635 A1 US 2001046877 A1	19-10-2001 19-10-2001 17-10-2001 10-10-2001 29-11-2001